


SPOJNICE

SPOJNICE - L


Velicina	Tip	A	B	D	E	Std rupa	Širina rupe/mm		Težina kg	Cena €		
							min	max		metal	guma	Komplet (guma + 2 metala)
L035	1	16	20,5	6,6	/	3	3	8	0,12	2.18	1.02	5.38
L050	1	28	43,2	15,6	/	6	6	15	0,16	2.54	1.14	6.22
L070	1	35	50,8	19	/	9	9	19	0,4	2.70	1.45	6.86
L075	1	45	54,7	21	/	9	9	25	0,55	3.76	1.85	9.36
L090	1	54	54,7	21	/	9	9	28	0,8	4.18	2.21	10.56
L095	1	54	63,7	25,5	/	9	9	28	0,88	4.37	2.30	11.05
L100	1	64,5	88,5	35	/	12	12	35	1,75	9.11	2.82	21.03
L110	1	85	108	43	/	15	15	48	3,62	13.02	4.40	30.43
L150	1	96	115,4	45	/	15	15	48	4,9	18.22	6.93	43.38
L190	2	102	133,4	54	101,6	19	19	55	7,7	25.09	9.22	59.40
L225	2	108	153,4	64	108	19	19	65	10.00	33.74	11.20	78.69

*** Uložak gumeni: Crni -30 +120°C 75Sh-A, Narandžasti -40 +80°C 90Sh-A, Žuta -40 +90°C 92Sh-A

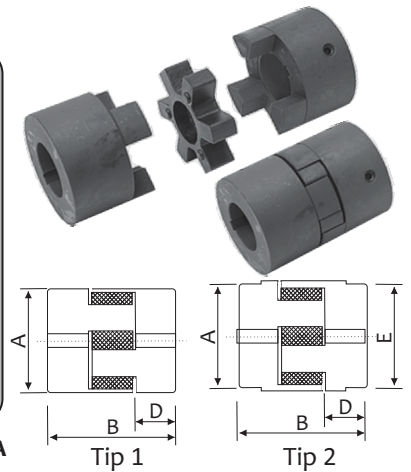

SPOJNICE - POLIMER


Model	Širina rupe		A	d	G	D	S	K	H1	Cena €		
	MIN	MAX								metal	polimer	Komplet (polimer + 2 metala)
14	6	14	37	24	23	40	4	6	46	5.26	3.97	14.49
19	8	19	37	30	25	48	4	6	50	8.94	4.79	22.67
24	10	24	41	36	26	52	4	8	56	10.02	4.41	24.45
28	10	28	46	44	40	66	4	9	84	10.70	6.95	28.35
32	12	32	48	50	40	76	4	9	84	15.33	9.36	40.02
38	14	38	48	58	40	83	4	9	84	17.18	11.27	45.63
42	20	42	50	65	42	92	4	9	88	24.25	20.25	68.75
48	20	48	50	67	50	95	4	9	104	27.12	18.67	72.91
55	25	55	58	82	52	114	4	10	108	27.68	18.80	74.16
65	25	65	68	95	55	132	4	12	114	69.91	28.31	168.13

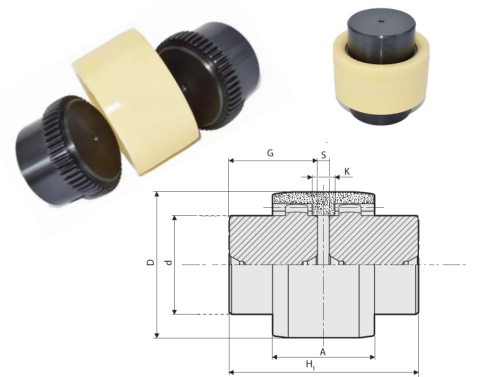

SPOJNICE - GE/GR


Velicina	Komponenta	Maksimalni obrt.mom. (NM) Std rupe			Završna rupe (d) min-max	L	C	E	N	S	D	dh	ba:bd	G	Težina kg	Cena €		
		92 ShA Zuta	98 ShA Crvena	80 ShD Crna												metal	guma	Komplet (guma + 2 metala)
14					4-16	35	11	13	10	1.5	30	10			0,45	3.76	2.00	9.52
19/24	GE 1	10	17	21	6-16	66	25	16	12	2	40	18	32	20	0,55	3.96	2.11	10.03
24/32	GE 1a	35	60	75	9-24	78	30	18	14	2	55	27	40	24	0,95	5.55	2.95	14.05
28/38	GE 1a	95	160	200	10-28	90	35	20	15	2,5	65	30	48	28	1,6	8.97	4.78	22.72
38/45	GE 1a	190	325	405	12-38	114	45	24	18	3	80	38	65	37	3	13.47	7.18	34.12
42/55	GE 1a	265	450	560	12-42	126	50	26	20	3	95	46	75	40	4,45	19.58	10.43	49.58
48/60	GE 1a	310	525	655	12-48	140	56	28	21	3,5	105	51	85	45	6,15	25.02	13.61	63.65
55/70	GE 1a	410	685	825	15-55	160	65	30	22	4	120	60	98	52	9,5	38.85	18.78	96.48
65/75	GE 1a	625	940	1175	15-65	185	75	35	26	4,5	135	68	115	61	14,5	66.00	14.40	146.40
75/90	GE 1a	1280	1920	2400	15-75	210	85	40	30	5	160	80	133	69	22,5	82.50	36.00	201.00
90/100	GE 1a	2400	3600	4500	15-90	245	100	45	34	5,5	200	100	158	81	38,1	135.00	60.00	330.00

*** Uložak gumeni: Crni -40 +80°C 80 Sh-A, Žuti -40 +80°C 92 Sh-A, Crveni -30 +90°C 98 Sh-A

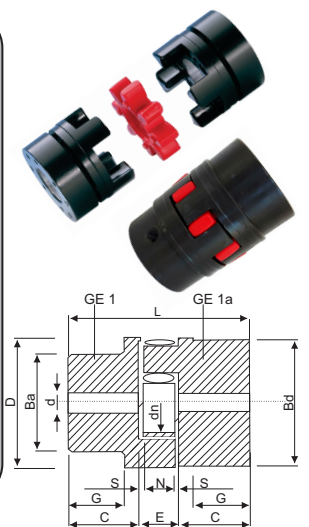

SPOJNICE - JC

Model	Širina rupe /mm		D	L	L1	L2	F	E	B	C	R	DK	M	Moment zaključavanja(N.m)	Cena €
	min	max													
JC 14-C	3	6	14	22	7	7	3,5	8	6	1	/	17,2	M2,5	0,5	8.65
JC 16-C	3	7	16	22	7	7	3,5	8	6	1	/	19,2	M2,5	0,5	9.14
JC 20-C	4	10	20	30	10	10	5	10	8	1	1,2	24	M3	1,5	9.14
JC 25-C	4	12	25	34	11	11	5	12	10	1	2	27	M4	1,5	9.64
JC 30-C	5	16	30	35	11	11	5	13	10	1,5	2	31,4	M4	1,7	11.68
JC 40-C	8	24	40	66	25	25	10	16	12	2	4	47	M5	8	19.80
JC 55-C	10	28	55	78	30	30	10,5	18	14	2,00	4	60	M6	8	36.04
JC 65-C	12	38	65	90	35	35	11,5	20	15	3	4	72	M8	16	50.94
JC 80-C	16	45	80	114	45	45	15,5	24	18	3,00	4	80	M8	16	92.13
JC 95-C	20	55	95	126	50	50	18	26	20	3		95	M10	40	133.53

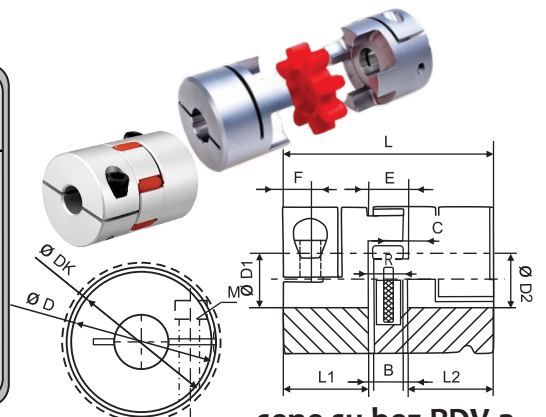

cene su bez PDV-a


Cene su podložne promenama - postoji mogućnost odobravanja rabata
+381 18 226 364, 018 222 927, 064 89 00 735

www.ami.rs

SKF**ZVEZDASTA SPOJNICA**

Ovlašćeni distributer za Srbiju


Oznaka	Velicina	B min	B max	L	E	H	G	Zavrtnaj za osiguranje	Masa	Brzina n max	Gumena zvezda	Metalna glavčina	Kompletna spojnica (guma + 2 metala)
		mm	mm	mm	mm	mm	mm	/	kg	r/min	€/kom	€/kom	€/kom
PHE L035	035	3,20	9,5	20,6	6,7	15,9	/	/	0,03	31 000	1.60	3.11	7.81
PHE L050	050	6,35	14,0	44,0	16,0	27,5	6,5	M6	0,05	18 000	1.80	3.63	9.06
PHE L070	070	6,35	19,0	51,0	19,0	35,0	9,5	M6	0,12	14 000	2.28	3.86	10.01
PHE L075	075	6,35	24,0	54,0	21,0	44,5	9,0	M6	0,22	11 000	2.88	5.36	13.60
PHE L090	090	6,35	24,0	54,0	21,0	54,0	8,7	M6	0,28	9 000	3.43	5.96	15.36
PHE L095	095	11,11	28,0	64,0	25,0	54,0	11,0	M8	0,31	9 000	3.43	7.02	17.47
PHE L100	100	12,70	35,0	89,0	35,0	65,0	11,0	M8	0,75	7 000	4.39	10.67	25.74
PHE L110	110	15,87	42,0	108,0	43,0	84,0	19,0	M10	1,50	5 000	6.84	18.58	44.01
PHE L150	150	15,87	48,0	115,0	45,0	96,0	22,0	M10	2,40	4 000	10.80	26.03	62.86
PHE L190	190	19,05	55,0	133,0	54,0	102,0	22,0	M12	3,50	3 600	14.34	35.84	86.03
PHE L225	225	19,05	60,0	153,0	64,0	108,0	29,0	M12	4,50	3 600	17.46	48.20	113.86

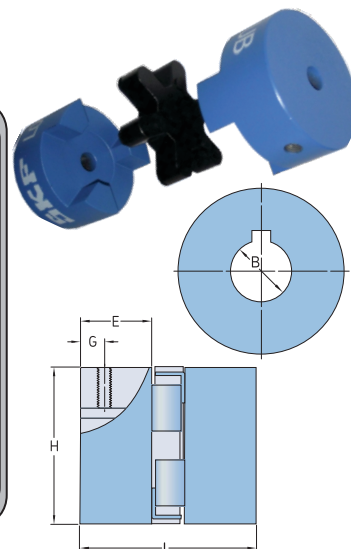**SKF****SPOJNICA FRC za TB konusni steznik**


Ovlašćeni distributer za Srbiju

Velicina	Zbirna dužina zavisno od tipa spojnice			Težina	Inercia	Torziona krutost	Neusklađenost ugaona	Normalni obrtni moment	Maksimalni obrtni moment	Cena €		
	FF, FH, HH	FB, HB	BB							metal TipF/TipH	guma	2 metala + guma
70	65.0	65.0	65.0	1.00	0.00085		1	31.5		7.25	3.65	18.15
90	69.5	76.0	82.5	1.17	0.00115		1	80	180	9.90	5.50	25.30
110	82.0	100.5	119.0	5.00	0.004	65	1	160	360	15.58	8.55	39.71
130	89.0	110.0	131.0	5.46	0.0078	130	1	315	720	24.30	13.30	61.90
150	107.0	129.5	152.0	7.11	0.0181	175	1	600	1500	27.63	20.35	75.61
180	142.0	165.5	189.0	16.60	0.0434	229	1	950	2350	43.47	36.76	123.70
230	164.5	202.0	239.5	26.00	0.1207	587	1	2000	5000	77.17	65.35	219.69
280	207.5	246.5	285.5	50.00	0.4465	1025	1	3150	7200	146.11	109.35	401.57

Velicina	Dimenzija		Tip F, H	Konusni prečnik		c	D	J	C	D
	OD	H		Min.	Max.					
70	69	60	1008	9	25	20.0	23.5	29	20	25.8
90	85	70	1108	9	28	19.5	23.5	29	26	30.0
110	112	100	1610	14	42	18.5	26.5	38	37	45.3
130	130	105	1610	14	42	18.0	26.5	38	39	47.5
150	150	115	2012	14	50	23.5	33.5	42	46	60.0
180	180	125	2517	16	60	34.5	46.5	48	58	70.0
230	225	155	3020	25	75	39.5	52.5	55	77	90.0
280	275	206	3525	35	100	51.0	66.5	67	90	105.5



Tip F



Tip H


SKF**MAST ZA REŠETKASTE I ZUPČASTE SPOJNICE**

Ovlašćeni distributer za Srbiju

Mast je na bazi mineralnog ulja sa polietilenskim zgušnjivačem, formulisana za primene sa visokim centrifugalnim silama i visokim obrtnim momentom, za rešetkaste i zupčaste spojnice, čak i za uslove gde se javljaju jaka udarna opterećenja, neusklađenost i vibracije. Curenje je sprečeno pri velikim brzinama a mast je stabilne konzistencije, stepen NLGI konzistencije 1. Temperaturni opseg 0–120 °C, tačka kapanja (min) 160 °C

LMCG 1/0.4, 420ml - 8,7€**SKF****KARDANSKI ZGLOB**

Ovlašćeni distributer za Srbiju


UJMB

Dupli

UJMA

Oznaka	L	D	R	C	Obrtni moment	Cena
	mm	mm	mm	mm	N/m	€/kom
PHE UJMB 16	77	16	26	25	45	19.80
PHE UJMB 20	92	20	31	30	88	22.66
PHE UJMB 25	110	25	37	36	180	26.58
PHE UJMB 32	133	32	43	47	405	27.50
PHE UJMB 40	164	40	54	56	860	41.50
PHE UJMB 45	183	45	60	63	1250	44.58
PHE UJMB 50	202	50	66	70	1730	55.75
PHE UJMB 63	250	63	83	84	3400	62.00

Oznaka	L	D	Obrtni moment	Cena
	mm	mm	N/m	€/kom
PHE UJMA10	38	10	13,5	15.53
PHE UJMA13	45	13	26	16.10
PHE UJMA16	52	16	45	16.45
PHE UJMA20	62	20	88	16.68
PHE UJMA25	74	25	180	17.83
PHE UJMA32	86	32	405	18.98
PHE UJMA40	108	40	860	20.87
PHE UJMA45	120	45	1250	26.45
PHE UJMA50	132	50	1730	35.65
PHE UJMA63	166	63	3400	47.15

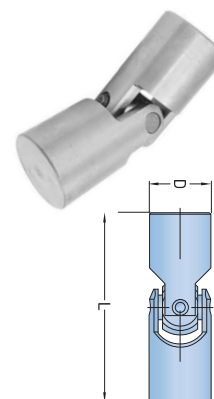

*** Napomena: Telo zgloba nije probušeno, rupa se buši naknadno po potrebi

Cene su podložne promenama - postoji mogućnost odobravanja rabata
+381 18 226 364, 018 222 927, 064 89 00 735

www.ami.rs